




SDT-150

Small Diameter FEP



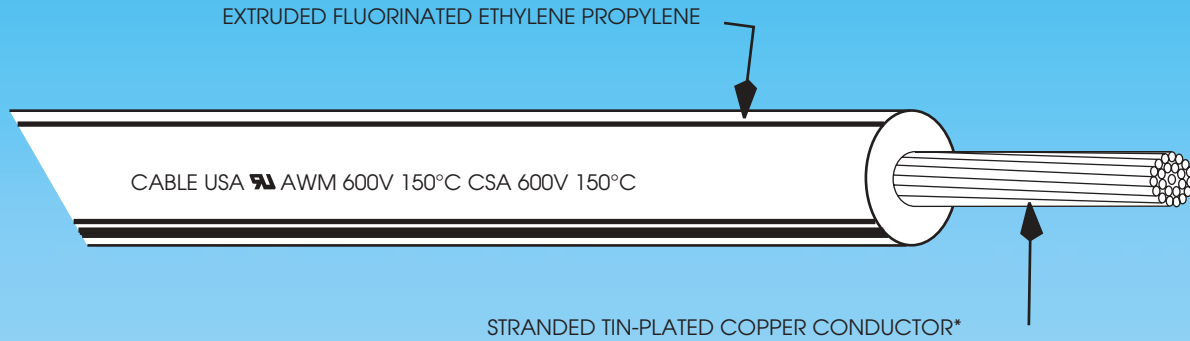

Cable USA SDT-150 is the flexible version of SDT-200. The insulation is chemical resistant and is easily stripped. **SDT-150** is suitable for immersion in gasoline; gasoline vapor and 80°C in oil. **Cable USA SDT-150** is available in colors and long continuous length reels or drums.

CABLE USA P/N	AWG	STRANDING	NOMINAL CONDUCTOR DIAMETER	NOMINAL FINISHED O.D. (INCHES)	APPROX. WT LBS./MFT	** AMPACITY
600 VOLTS						
572401C6	24	19 X 36	.024	.066	4.2	6
572201C6	22	19 X 34	.029	.072	5.4	9
572001C6	20	19 X 32	.038	.080	7.3	13
571801C6	18	19 X 30	.047	.089	9.6	18
571601C6	16	19 X 29	.055	.098	11.9	31
571401C6	14	19 X 27	.067	.109	19	40
571201C6	12	37 X 28	.088	.130	24.8	47
571001C6	10	37 X 26	.110	.152	36.3	63
570801C6	8	133 X 29	.166	.226	69.6	83
570601C6	6	133 X 27	.202	.268	103.4	112
570401C6	4	133 X 25	.266	.328	157.5	148
570201C6	2	665 X 30	.335	.397	250.9	198
570101C6	1	836 X 30	.365	.468	327.6	228
571X01C6	1/0	1045 X 30	.424	.518	426.9	263
572X01C6	2/0	1330 X 30	.477	.571	508.7	305
573X01C6	3/0	1666 X 30	.485	.579	610.4	351
574X01C6	4/0	2107 X 30	.601	.695	766.9	411
300 VOLTS						
572601C3	26	7 X 34	.019	.049	2.3	4
572401C3	24	19 X 36	.024	.054	3.1	6
572201C3	22	19 X 34	.029	.060	4.3	9
572001C3	20	19 X 32	.039	.068	6.0	13
571801C3	18	19 X 30	.047	.077	8.8	18
571601C3	16	19 X 29	.056	.082	11.0	31
571401C3	14	19 X 27	.067	.097	16.4	40
571201C3	12	37 X 28	.088	.115	24.8	47

*Grade A Nickel also available. Strandings shown are standard. Optional strandings and conductor materials available. Please consult Sales Department.

** Ampacity based on single conductor in free air, ambient temperature of 40°C (104°F), & conductor at maximum rating.