




SDT-200 Small Diameter FEP

CSA

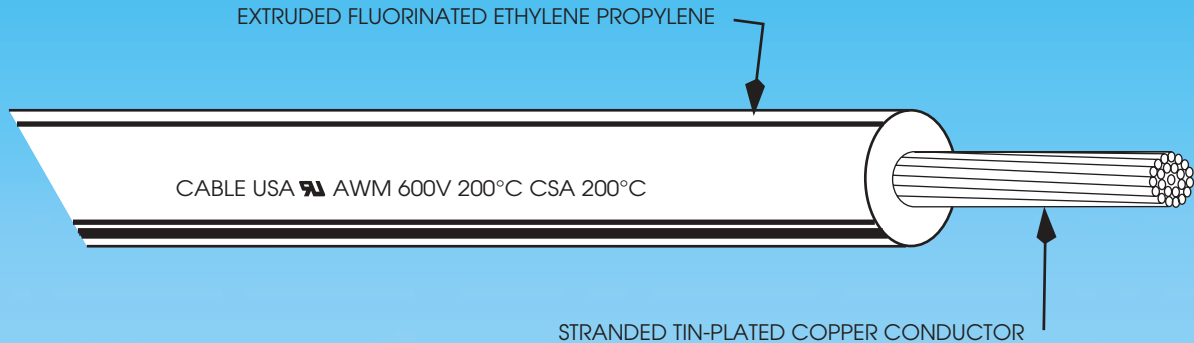

Cable USA SDT-200 is an inexpensive small diameter lead wire designed for appliances and commercial cooking equipment. The insulation is chemical resistant and is easily stripped. **SDT-200** is suitable for immersion in gasoline; gasoline vapors and 80°C in oil. **SDT-200** is available in colors and long continuous length reels.

CABLE USA P/N	AWG	STRANDING **	NOMINAL CONDUCTOR DIAMETER	NOMINAL FINISHED O.D. (INCHES)	APPROX. WT LBS./MFT	*** AMPACITY
600 VOLTS						
572401C6.FEP	24*	7 X 32	.024	.066	4.2	7
572201C6.FEP	22*	7 X 30	.030	.072	5.4	10
572001C6.FEP	20*	10 X 30	.038	.080	7.3	14
571801C6.FEP	18	7 X 26	.047	.089	9.6	20
571601C6.FEP	16	7 X 24	.058	.098	11.9	35
571401C6.FEP	14	7 X 22	.072	.112	18.9	54
571201C6.FEP	12	19 X .0185	.088	.130	24.8	68
571001C6.FEP	10	37 X 26	.110	.152	36.3	90
570801C6.FEP	8	49 X .0184	.166	.226	69.6	124
570601C6.FEP	6	49 X .0231	.208	.268	103.4	165
570401C6.FEP	4	133 X 25	.266	.328	157.5	220
570201C6.FEP	2	133 X 23	.335	.397	250.9	293
570101C6.FEP	1	259 X 25	.378	.468	327.6	344
571X01C6.FEP	1/0	259 X 24	.424	.518	426.9	399
572X01C6.FEP	2/0	259 X 23	.477	.571	508.7	467
573X01C6.FEP	3/0	259 X 22	.485	.579	610.4	546
574X01C6.FEP	4/0	259 X 21	.601	.695	766.9	629
300 VOLTS						
572601C3.FEP	26*	7 X 34	.019	.049	2.3	5
572401C3.FEP	24*	7 X 32	.024	.054	3.1	7
572201C3.FEP	22*	19 X 34	.029	.060	4.3	10
572001C3.FEP	20*	19 X 32	.039	.068	6.0	14
571801C3.FEP	18	7 X 26	.047	.077	8.8	20
571601C3.FEP	16	7 X 24	.058	.083	11.0	35
571401C3.FEP	14	7 X 22	.072	.097	16.4	54
571201C3.FEP	12	19 X .0185	.088	.115	24.8	68

* Nickel Plated Copper Conductor. Grade A Nickel is optional and available in all sizes.

** Strandings shown are standard. Optional strandings and conductor materials available. Please consult Sales Department.

*** Ampacity based on single conductor in free air, ambient temperature of 40°C (104°F), & conductor at maximum rating.

Cable USA, Inc.

2584 So. Horseshoe Dr. / Naples, Florida 34104-6131 / (239) 643-6400 / Fax (239) 643-4230
World Wide Web: <http://www.cableusainc.com> / E-mail: sales@cableusa.cc