




SRML

600 Volt Motor Lead Wire

CSA

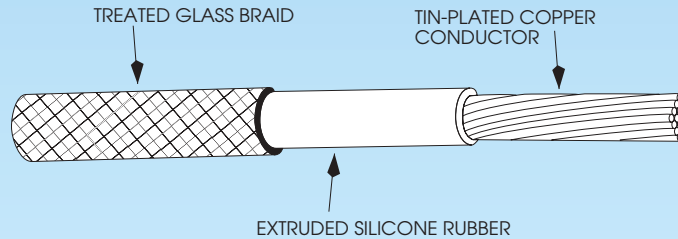

PRODUCT FEATURES:

- Utilizes Class H or K stranding for extra flexibility.
- Engineered to withstand repeated flexing and ease installation.
- Tin-coated conductors for improved terminations, high temperature resistance and corrosion protection.
- Silicone rubber provides a high-temperature moisture resistant, easy to strip insulation.
- Closely woven glass braid is treated with a heat and moisture resistant finish to eliminate fraying.
- Flame retardant.
- Provides circuit integrity during flame conditions.
- Engineered to withstand harsh and demanding environments where standard cables fail.

OPTIONS:

- Available in all colors with or without tracers.
- Available in CABLE USA **Cableclad-2** MC armor.

PART NUMBER	SIZE		STRANDING	INSL. WALL		NOM. O.D.		APPROX WT.		** AMPACITY
	AWG	MM ²		MILS	MM	INCHES	MM	#/MFT	KG/KM	
702201C6	22	.34	7	30	.76	.105	2.67	8	12	10
702001C6	20	.50	10	30	.76	.111	2.82	9	13	14
111801C6	18	.75	16	30	.76	.121	3.07	12	18	20
111601C6	16	1.50	26	30	.76	.131	3.33	16	24	35
701401C6	14	2.50	41	30	.76	.147	3.73	22	33	54
701201C6	12	4.0	65	30	.76	.166	4.22	32	48	68
701001C6	10	6.0	105	45	1.14	.226	5.74	62	92	90
700801C6	8	10.0	133	60	1.52	.314	7.98	90	134	124
700601C6	6	16.0	133	60	1.52	.357	9.07	140	208	165
700401C6	4	25	133	60	1.52	.411	10.44	205	305	220
700201C6	2	35	133	60	1.52	.485	12.32	300	446	293
700101C6	1	50	259	80	2.03	.570	14.48	362	539	344
701X01C6	1/0	60	259	80	2.03	.615	15.62	445	662	399
702X01C6	2/0	70	259	80	2.03	.670	17.02	550	820	467
703X01C6	3/0	95	259	80	2.03	.730	18.54	675	1004	549
704X01C6	4/0	120	259	80	2.03	.800	20.32	830	1235	629

** Ampacity based on single conductor in free air at ambient temperature of 40°C (104°F) & conductor at maximum rating. Larger sizes available. See product type SRK.